


- 縦断方向の接続は、プレート接続を基本としております。
- 施工が容易な止水パッキンにより、漏水防止効果が図れます。



呼び	寸法(mm)							参考重量(kg)	
	a	b	d	e	f	A	H	L=2000	L=1500
NFK- 30× 25	300	250	75	60	75	420	400	496	372
NFK- 30× 30	300	300	75	60	75	420	450	519	389
NFK- 30× 40	300	400	75	60	75	420	550	579	434
NFK- 30× 50	300	500	75	70	75	440	650	704	528
NFK- 36× 36	360	360	85	65	85	490	530	677	508
NFK- 40× 25	400	250	95	65	95	530	440	695	—
NFK- 40× 30	400	300	90	65	90	530	480	701	526
NFK- 40× 35	400	350	95	65	95	530	540	760	—
NFK- 40× 40	400	400	90	65	90	530	580	766	574
NFK- 40× 50	400	500	95	70	95	540	690	892	669
NFK- 40× 60	400	600	100	80	100	560	800	1069	801
NFK- 45× 45	450	450	100	70	100	590	650	946	709
NFK- 50× 40	500	400	105	75	105	650	610	1017	—
NFK- 50× 50	500	500	105	75	105	650	710	1101	826
NFK- 50× 60	500	600	110	80	110	660	820	1249	—
NFK- 50× 70	500	700	110	85	110	670	920	1375	—
NFK- 50× 80	500	800	110	90	110	680	1020	1511	—
NFK- 60× 50	600	500	110	80	110	760	720	1285	—
NFK- 60× 60	600	600	110	80	110	760	820	1365	1023
NFK- 60× 80	600	800	110	90	110	780	1020	1670	1252
NFK- 70× 70	700	700	120	85	120	870	940	1762	1321
NFK- 80× 80	800	800	130	90	130	980	1060	2130	1597
NFK- 90× 90	900	900	140	95	140	1090	1180	2530	1897
NFK-100× 80	1000	800	150	100	140	1200	1090	2702	—
NFK-100×100	1000	1000	150	100	140	1200	1290	2902	2176

※人孔、ステップ、横穴、アンカー差し筋等は別途承ります。

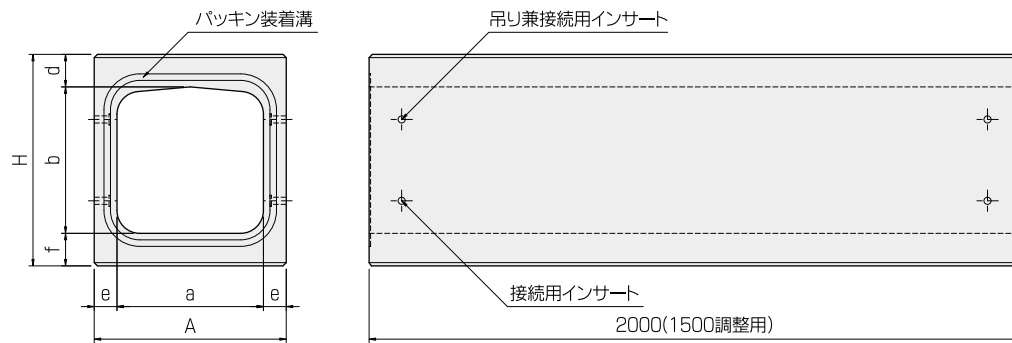