



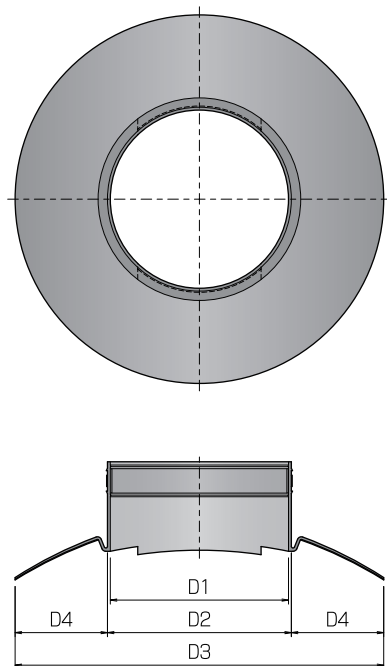

呼び		寸法(mm)				標準 削孔径	屈曲角度
用途	品番	D1	D2	D3	D4		
塩ビ管用	V-75	92	99	332	111.5	164	10°
	V-100	117	124	347	111.5	164	10°
	V-125	143	150	373	111.5	206	10°
	V-150	168	175	398	111.5	206	10°
	V-200	219	226	453	113.5	252	10°
	V-250	270	277	517	120	304	10°
	V-300	321	328	568	120	356	10°
	V-350	373	380	620	120	410	10°
	V-400	425	432	692	130	464	10°
ヒューム管用	H-150	219	226	468	121	252	10°
	H-200	257	264	504	120	304	10°
	HT-250	309	316	556	120	356	10°
	HT-300	363	370	610	120	410	10°
	HT-350	425	432	692	130	464	10°
陶管用	HT-250	309	316	556	120	356	10°
	HT-300	363	370	610	120	410	10°
	HT-350	425	432	692	130	464	10°
リブ管用	RB-150	178	185	425	120	252	10°
	RB-200	235	242	482	120	304	10°
	RB-250	293	300	540	120	356	10°
	RB-300	351	358	598	120	410	10°
	RB-350	408	415	655	120	464	10°

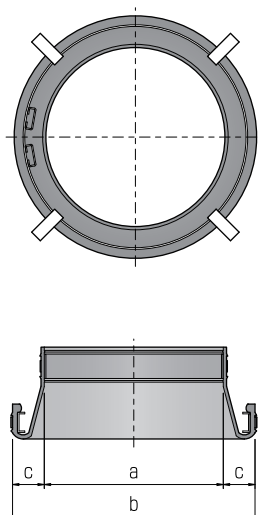

呼び		寸法(mm)			標準 削孔径	屈曲角度
用途	品番	a	b	c		
塩ビ管用	V-100A	118	200	41.0	206	15°
	V-100B	118	204	43.0	210	15°
	V-125A	144	246	51.0	252	15°
	V-125B	144	256	55.0	262	15°
	V-150A	169	246	38.5	252	15°
	V-150B	169	256	43.5	262	15°
	V-200A	220	298	39.0	304	15°
	V-200B	220	308	44.0	314	15°
	V-250A	271	350	39.5	356	15°
	V-250B	271	360	44.5	366	15°
	V-300A	322	404	41.0	410	15°
	V-300B	322	414	46.0	420	15°
	V-350AA	374	449	37.5	464	15°
ヒューム管用	H-200B	258	360	51.0	366	15°
	H-250B	310	414	52.0	420	15°
陶管用	T-200B	253	360	53.5	366	15°
	T-250B	310	414	52.0	420	15°
ハイセラミック 管用	S-150A	182	298	58.0	304	15°
	S-150B	182	308	63.0	314	15°
	S-200A	241	350	54.5	356	15°
	S-200B	241	360	59.5	366	15°
リブ管用	RB-N150A	178	246	34.0	252	15°
	RB-N150B	178	246	34.0	262	15°
	RB-N200A	236	298	31.0	304	15°
	RB-N200B	236	298	31.0	314	15°
	RB-N250A	294	350	28.0	356	15°
	RB-N250B	294	350	28.0	366	15°